

Selectable  
CAP168  
Flash  
Pattern



# LPB LED RANGE

## MAIN FEATURES

- Multi-voltage (10-30V)
- Double flash & rotating patterns meet R65 (amber and clear models only)
- Manufactured with 12 x 3W LEDs
- Current consumption: 1.8A @ 12V, 0.9A @ 24V
- Selectable CAP168 airport flash pattern
- Clear lens/amber flash model (page 12)
- -30°C to +50°C extreme temperature reliability
- Heavy duty aluminium base



## KEY POINTS

**R65**  
APPROVED

**R10**  
APPROVED

**3 YEAR**  
WARRANTY

**IP56**  
INGRESS  
PROTECTION

## LENS COLOURS



AMBER



BLUE





GREEN



RED



MAX  
70mph  
120kph

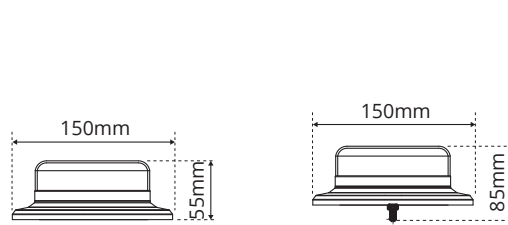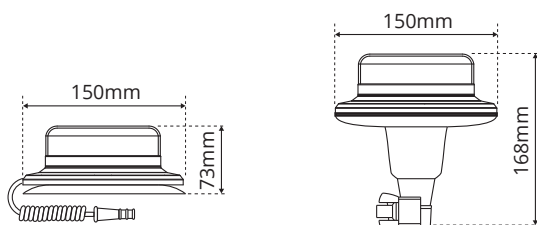

LPB020	LPB040	LPB050	LPB060
Magnetic	Flexi-DIN	3-Point	Single Point
0.7KG	0.8KG	0.5KG	0.5KG