

CLBT162A RANGE

MAIN FEATURES

- Multi-voltage (10-30V)
- Amber polycarbonate lens
- Available in single point and twin point fixings
- Double flash only
- 120 flashes per minute
- Dimensions: 400 (L) x 180 (W) x 134mm (H)
- Manufactured with 48 x 3W LEDs




KEY POINTS



Part Number	Mounting	Current @ 12V / 24V
CLBT162A/SP	Single Point	3.0A / 1.5A
CLBT162A/TB	Twin Point	3.0A / 1.5A

LAP1556AC/SP

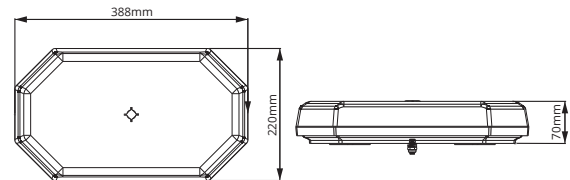

MAIN FEATURES

- Multi-voltage (10-30V)
- Clear polycarbonate lens
- Single point fixing
- 10 flash patterns
- Single flash pattern meets R65 approval
- Manufactured with 56 x 0.5W amber LEDs



KEY POINTS



Part Number	Mounting	Current @ 12V / 24V
LAP1556AC/SP	Single Point	2.3A / 1.2A