



# FLED3A MODULE


## MAIN FEATURES

- Multi-voltage (10-30V)
- 16 flash patterns (double flash R65 approval)
- Manufactured with 3 x 3W LEDs
- Link multiple units for sync / alternate flash
- Current consumption: 0.2A @ 12V, 0.1A @ 24V
- Steady on function

## KEY POINTS



## LED COLOURS

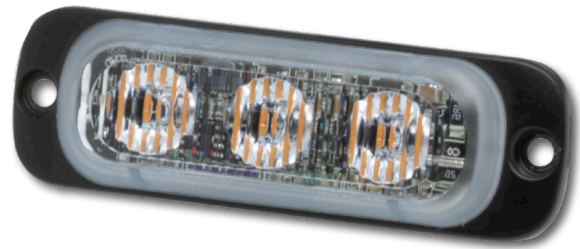

Part Number	Dimensions (L) x (W) x (H)	Current @ 12V / 24V
FLED3A	86 x 28 x 9mm	0.2A / 0.1A

# FLED6A RANGE


## MAIN FEATURES

- Multi-voltage (10-30V)
- 23 flash patterns (double flash R65 approval)
- Manufactured with 6 x 3W LEDs
- Link multiple units for sync / alternate flash
- Current consumption: 0.5A @ 12V, 0.3A @ 24V
- Steady on function

## KEY POINTS



## LED COLOURS

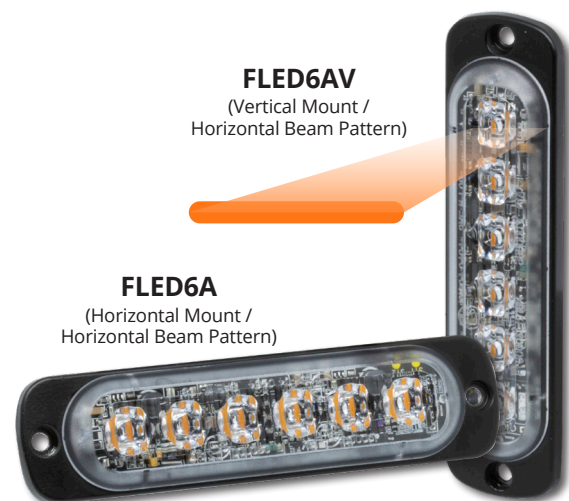

Part Number	Dimensions (L) x (W) x (H)	R65 Mounting Position
FLED6A	113 x 28 x 9mm	Horizontal
FLED6AV	113 x 28 x 9mm	Vertical