


## LAP22807

### MAIN FEATURES

- Multi-voltage (12-36V)
- Manufactured with 9 x 3W LEDs
- 2160 effective Lumen
- IP67 & IP69K ingress protection
- Stainless steel brackets and fixings
- Dimensions: 125 (L) x 125 (W) x 60mm (H)
- Current consumption: 1.5A @ 12V, 0.7A @ 24V




### KEY POINTS



## LAP22809

### MAIN FEATURES

- Multi-voltage (12-36V)
- Manufactured with 6 x 3W LEDs
- 1440 effective Lumen
- IP67 & IP69K ingress protection
- Stainless steel brackets and fixings
- Dimensions: 105 (L) x 105 (W) x 55mm (H)
- Current consumption: 1.0A @ 12V, 0.4A @ 24V




### KEY POINTS



## LAPS186P

### MAIN FEATURES

- Multi-voltage (12-36V)
- Manufactured with 6 x 3W LEDs
- 1600 effective Lumen
- IP67 & IP69K ingress protection
- Stainless steel brackets and fixings
- Dimensions: 110 (L) x 110 (W) x 47mm (H)
- Current consumption: 1.0A @ 12V, 0.5A @ 24V




### KEY POINTS



## LAPS124P

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 4 x 3W LEDs
- 960 effective Lumen
- IP67 & IP69K ingress protection
- Stainless steel brackets and fixings
- Dimensions: 90 (L) x 90 (W) x 45mm (H)
- Current consumption: 0.8A @ 12V, 0.4A @ 24V




### KEY POINTS



## LAPS4816

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 16 x 3W LEDs
- 3000 effective Lumen
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 110 (L) x 110 (W) x 70mm (H)
- Current consumption: 2.7A @ 12V, 1.4A @ 24V




### KEY POINTS



## LAPS279

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 9 x 3W LEDs
- 1400 effective Lumen
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 110 (L) x 110 (W) x 70mm (H)
- Current consumption: 2.1A @ 12V, 1.1A @ 24V



### KEY POINTS






## LAPS279S

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 9 x 3W LEDs
- 1400 effective Lumen
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 110 (L) x 110 (W) x 70mm (H)
- Current consumption: 2.1A @ 12V, 1.1A @ 24V



**On/Off Switch**  
Manufactured with on/off switch




### KEY POINTS



## LAPS139

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 9 x 1.5W LEDs
- 1210 effective Lumen
- IP67 & IP69K ingress protection
- Stainless steel brackets and fixings
- Dimensions: 100 (L) x 100 (W) x 40mm (H)
- Current consumption: 1.1A @ 12V, 0.5A @ 24V




### KEY POINTS



## LAPS099P

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 9 x 1W LEDs
- 1000 effective Lumen
- IP67 & IP69K ingress protection
- Plastic housing
- Dimensions: 110 (L) x 110 (W) x 34mm (H)
- Current consumption: 0.9A @ 12V, 0.4A @ 24V




### KEY POINTS



## LAPS155

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 5 x 3W LEDs
- 1100 effective Lumen
- IP67 ingress protection
- Powder coated brackets and fixings
- Dimensions: 110 (L) x 110 (W) x 35mm (H)
- Current consumption: 1.3A @ 12V, 0.6A @ 24V




### KEY POINTS



## LAPS124

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 4 x 3W LEDs
- 800 effective Lumen
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 66 (L) x 66 (W) x 66mm (H)
- Current consumption: 1.0A @ 12V, 0.5A @ 24V




### KEY POINTS



## LAPS128

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 8 x 1.5W LEDs
- 900 effective Lumen
- IP68 & IP69K ingress protection
- Stainless steel brackets and fixings
- Dimensions: 52 (L) x 52 (W) x 32mm (H)
- Current consumption: 0.8A @ 12V, 0.4A @ 24V



### KEY POINTS








## LAPR3913

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 13 x 3W LEDs
- 2400 effective Lumen
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 119 (L) x 142 (W) x 74mm (H)
- Current consumption: 2.8A @ 12V, 1.4A @ 24V




### KEY POINTS



## LAPR279

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 9 x 3W LEDs
- 1400 effective Lumen
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 110 (L) x 110 (W) x 70mm (H)
- Current consumption: 2.1A @ 12V, 1.1A @ 24V




### KEY POINTS



## LAPR124P360

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 4 x 3W LEDs
- 850 effective Lumen
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 86 (L) x 86 (W) x 49mm (H)
- Current consumption: 1.1A @ 12V, 0.5A @ 24V




### KEY POINTS



## LAPR248

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 8 x 3W LEDs
- 1400 effective Lumen
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 142 (L) x 90 (W) x 62mm (H)
- Current consumption: 1.7A @ 12V, 0.9A @ 24V




### KEY POINTS



## LAPF248

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 8 x 3W LEDs
- 1300 effective Lumen
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 160 (L) x 45 (W) x 45mm (H)
- Current consumption: 1.7A @ 12V, 0.9A @ 24V




### KEY POINTS



## LAPCV404

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 3 x 5W LEDs
- 675 effective Lumen
- IP67 ingress protection
- Supplied with rubber mounting bracket
- Dimensions: 78 (L) x 43 (W) x 24mm (H)
- Current consumption: 1.3A @ 12V, 0.6A @ 24V



63201855  
30° rubber mounting  
bracket available



### KEY POINTS






# LAPQ4515

## MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 15 x 3W LEDs
- 2600 effective Lumen
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 158 (L) x 121 (W) x 69mm (H)
- Current consumption: 3.8A @ 12V, 1.9A @ 24V




### KEY POINTS

**R10** APPROVED   **2 YEAR** WARRANTY   **IP67** INGRESS PROTECTION

# LAPQ186

## MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 6 x 3W LEDs
- 900 effective Lumen
- IP67 ingress protection
- Stainless steel brackets and fixings
- Dimensions: 110 (L) x 78 (W) x 55mm (H)
- Current consumption: 1.4A @ 12V, 0.7A @ 24V




### KEY POINTS

**R10** APPROVED   **2 YEAR** WARRANTY   **IP67** INGRESS PROTECTION

# LAPS155BAT

## MAIN FEATURES

- Manufactured with 5 x 3W LEDs
- 1000 effective Lumen
- IP44 ingress protection
- Rechargeable battery with 5 hour discharge time
- Dimensions: 132 (L) x 118 (W) x 275mm (H)
- Supplied with in-car and mains power adaptors
- 2 year warranty



### KEY POINTS


**R10** APPROVED   **2 YEAR** WARRANTY



# LAPS124PMAG

## MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 4 x 3W LEDs
- 960 effective Lumen
- IP67 & IP69K ingress protection
- Magnetic base and cigarette/DIN plug
- Dimensions: 116 (L) x 185 (W) x 138mm (H)
- Current consumption: 0.8A @ 12V, 0.4A @ 24V




### KEY POINTS

**R10** APPROVED   **PLASTIC HOUSING**   **3 YEAR** WARRANTY   **IP69K** INGRESS PROTECTION

# LAPS279MAG

## MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 9 x 3W LEDs
- 1400 effective Lumen
- IP67 ingress protection
- Magnetic base and cigarette/DIN plug
- Dimensions: 110 (L) x 125 (W) x 70mm (H)
- Current consumption: 2.1A @ 12V, 1.1A @ 24V




### KEY POINTS

**R10** APPROVED   **2 YEAR** WARRANTY   **IP67** INGRESS PROTECTION

# LAPR279MAG

## MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 9 x 3W LEDs
- 1400 effective Lumen
- IP67 ingress protection
- Magnetic base and cigarette/DIN plug
- Dimensions: 110 (L) x 125 (W) x 70mm (H)
- Current consumption: 2.1A @ 12V, 1.1A @ 24V



### KEY POINTS

**R10** APPROVED   **2 YEAR** WARRANTY   **IP67** INGRESS PROTECTION



## LAPCV405 & LAPCV406

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 52 x 1W OSRAM LEDs
- 5200 raw / 2296 effective Lumen
- Straight housing
- IP68 and IP69K ingress protection
- Angled flood beam
- Dimensions: 150 (L) x 47 (W) x 40mm (H)
- Current consumption: 1.5A @ 12V, 0.8A @ 24V



LAPCV405



LAPCV406

### KEY POINTS



## LAPCV407 & LAPCV408

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 20 x 1W OSRAM LEDs
- 2000 raw / 1229 effective Lumen
- Curved housing
- IP67 ingress protection
- Angled flood beam
- Dimensions: 231 (L) x 47 (W) x 40mm (H)
- Current consumption: 1.6A @ 12V, 0.8A @ 24V



LAPCV407



LAPCV408

### KEY POINTS



## LAPCV409 & LAPCV410

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 32 x 1W OSRAM LEDs
- 3200 raw / 1760 effective Lumen
- Curved housing
- IP67 ingress protection
- Angled flood beam
- Dimensions: 312 (L) x 47 (W) x 40mm (H)
- Current consumption: 2.7A @ 12V, 1.3A @ 24V



LAPCV409



LAPCV410

### KEY POINTS



## LAPCV411 & LAPCV412

### MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 46 x 1W OSRAM LEDs
- 4600 raw / 2522 effective Lumen
- Curved housing
- IP67 ingress protection
- Angled flood beam
- Dimensions: 392 (L) x 55 (W) x 48mm (H)
- Current consumption: 3.8A @ 12V, 1.9A @ 24V



LAPCV411



LAPCV412

### KEY POINTS



# STRØLUX RANGE

## MAIN FEATURES

- Multi-voltage (10-30V)
- Single & double LED row models available
- Manufactured with 5W OSRAM LEDs
- IP67 & IP69K ingress protection
- Strong polycarbonate lens
- Aluminium housing
- Combination of flood and spot reflectors



## KEY POINTS




Style	Part Number	Length	5W Osram LEDs	Effective Lumen	Dimensions (mm)		Current (A)	
					Height	Depth	@12V	@24V
Single Row	SLX1-07	7" / 177mm	6	1283	40	54	2.1	1.1
	SLX1-10	10" / 246mm	9	2054	40	54	3.4	1.7
	SLX1-21	21" / 522mm	21	4652	40	54	8.0	3.9
	SLX1-31	31" / 798mm	33	7445	40	54	12.5	6.1
	SLX1-40	40" / 1005mm	42	9499	40	54	14.9	7.8
	SLX1-50	50" / 1281mm	54	12324	40	54	19.2	10.1
Double Row	SLX2-03	3" / 70mm	4	800	72	60	1.5	0.8
	SLX2-08	8" / 204mm	12	2100	70	67	3.8	2.0
	SLX2-14	14" / 357mm	24	4200	70	67	7.7	4.0
	SLX2-22	22" / 561mm	40	7000	70	67	14.6	7.2
	SLX2-32	32" / 815mm	60	10500	70	67	20.8	10.1
	SLX2-42	42" / 1076mm	80	14000	70	67	28.3	14.3
	SLX2-50	50" / 1274mm	96	16800	70	67	30.6	16.4

# BB & SB RANGE

## MAIN FEATURES

- Multi-voltage (10-30V)
- Available in straight or curved design
- Strong polycarbonate lens
- IP67 ingress protection
- Aluminium housing
- Combination of flood and spot reflectors
- 1 year warranty

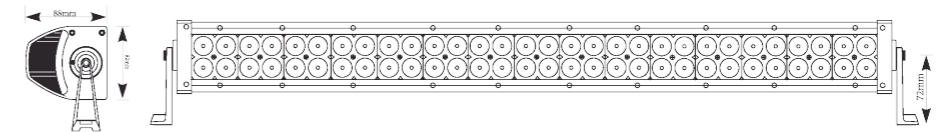

## KEY POINTS



Part Number	Style	Length	Number of 3W LEDs	Total Power	Effective Lumen
BB31	Curved	31" / 810mm	60	180W	8580
BB41	Curved	41" / 1060mm	80	240W	11440
BB50	Curved	50" / 1260mm	96	288W	13728
SB04	Straight	4" / 98mm	6	18W	518
SB08	Straight	8" / 203mm	12	36W	1092
SB12	Straight	12" / 295mm	20	60W	2730
SB22	Straight	22" / 550mm	40	120W	5720
SB31	Straight	31" / 810mm	60	180W	8580
SB41	Straight	41" / 1060mm	80	240W	11440
SB50	Straight	50" / 1260mm	96	288W	13728