

ROTATING RANGE




MAIN FEATURES

- 12V or dual voltage (12/24V) options
- ECE R65 approved (amber & blue only)
- 70mph rated on magnetic version
- Current consumption: 4.6A @ 12V, 3.0A @ 24V
- -30°C to +50°C extreme temperature reliability
- Unique maintenance free direct drive mechanism provides low noise operation
- Extra tough polycarbonate lenses



MAX
70mph
120kph

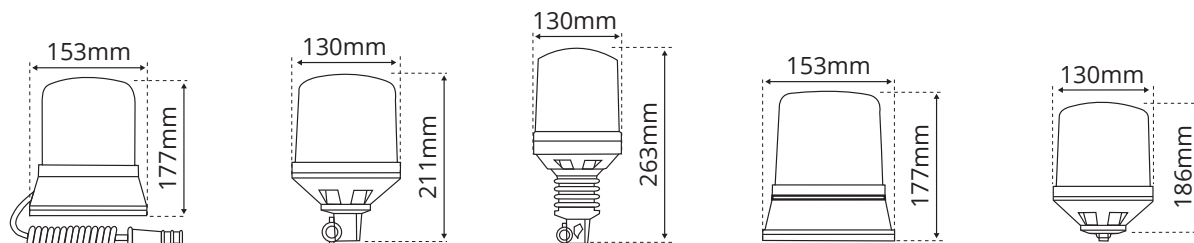

12V Only Models - Supplied with 12V Bulb

LAP259 (12V Only)	LAP269 (12V Only)	LAP271 (12V Only)	LAP254 (12V Only)	LAP121 (12V Only)
Magnetic	DIN	Flexi-DIN	3-Point	Single Point
1.2KG	0.8KG	0.8KG	0.5KG	0.7KG

12/24V Models - Supplied Without Bulb

LAP260 (12/24V)	LAP270 (12/24V)	LAP272 (12/24V)	LAP255 (12/24V)	LAP122 (12/24V)
Magnetic	DIN	Flexi-DIN	3-Point	Single Point
1.2KG	0.8KG	0.8KG	0.5KG	0.7KG

ECE R65 Approval is appropriate to rotating beacons with either an amber or blue lens fitted. 12/24V units are supplied without bulbs.