


LUNAR RANGE



MAIN FEATURES

- Multi-voltage (10-30V)
- Clear polycarbonate lens
- Supplied with 3m cable
- Selectable CAP168 airport flash pattern (not available on magnetic model)
- Four R65 approved flash patterns including single & double flash
- Manufactured with 0.5W amber LEDs

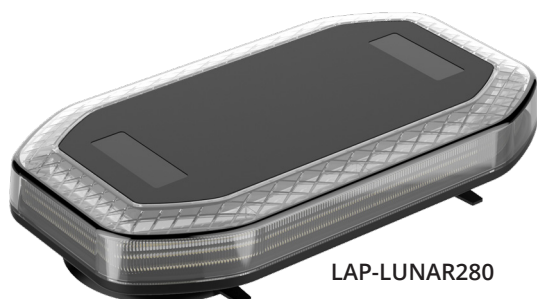

LAP-LUNAR280



LAP-LUNAR592



LAP-LUNAR889



LAP-LUNAR1194



LAP-LUNAR1505

Part Number	Length (A)	Number of 0.5W Amber LEDs	Width x Height	Mounting	CAP168 Flash Pattern	Current @ 12V / 24V
LAP-LUNAR280	280mm	108	259 x 36mm	Single Point	✓	4.5A / 2.3A
LAP-LUNAR280MAG	280mm	108	259 x 36mm	Magnetic	-	4.5A / 2.3A
LAP-LUNAR592	592mm	228	259 x 105mm	Four Point	✓	9.5A / 4.8A
LAP-LUNAR889	889mm	324	259 x 105mm	Four Point	✓	13.5A / 6.8A
LAP-LUNAR1194	1194mm	420	259 x 105mm	Four Point	✓	17.5A / 8.8A
LAP-LUNAR1505	1505mm	516	259 x 105mm	Four Point	✓	21.5A / 10.8A

